


IPHE-16, -8, -4T2

SPTS or MPTS RE/CROSS IPTV HD --> DVB-C or DVB-T or -T2
MODULATOR UP to 512 programs

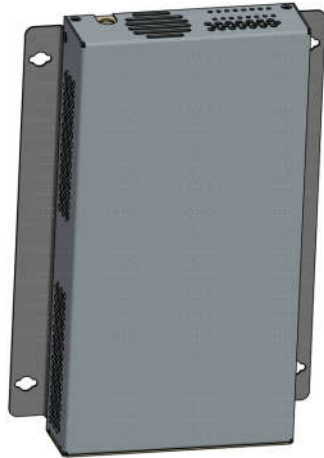

IPHE-16 transforms digital programs from up 512 SPTS or 16 MPTS to 16 independent DVB-C/T muxes

Light versions **IPHE-8** modulates 512 SPTS or 8 MPTS to 8 DVB-C or to 6 DVB-T muxes.

IPHE-4T2 512 SPTS or 4 MPTS to 4*DVB-T2 32k OUT

After IPHE process IPTV programs can be received with regular DVB TV or STB. Supports IGMP 1,2,3

Easy web based programming and remote configuration is possible.

Supports EPG. TOT/TDT editing.

Separate PID filtering possibility.

Can be assembled direct to wall mounting.

Possible to remotecontrol via Smartportal service by mobile phone , pad or PC over the world widely or via SNMP.

With direct to wall mounting external power supply

Models:

IPHE-16 512 SPTS or 16 MPTS > 16*DVB-C or 12*DVB-T

IPHE-8 512 SPTS or 8 MPTS > 8*DVB-C/6*DVB-T

IPHE-81602 512 SPTS or 8 MPTS > 8*DVB-T2 16k

IPHE-4T2 512 SPTS or 4 MPTS > 4*DVB-T2 32k



Features

- Input:
512 SPTS or 16 MPTS
- IPHE-16 output:
16 DVB-C or 12 DVB-T
- IPHE-8 output:
8 DVB-C or 6 DVB-T
- IPHE-4T2 output:
4 DVB-T2 outputs
- 4k UHD TV , HD and SD

Technical specification

Modulators

- Output Frequency range
114-1006 MHz
- Output level max 105dBuV
- Free output channel selection.

IPTV input

- RJ-45, 1000 Base-T, max 900Mbps
- Max 512*SPTS / 16*MPTS
- UDP/RTP

Universal:

- Power consumption
16 VDC/ 35W
- Dimensions:
43*270*175mm

