


IPDTM-2

4 TV PROGRAMS HTTP/HLS STREAMS FROM INTERNET

—> DVB-C/T FULL HD MODULATOR

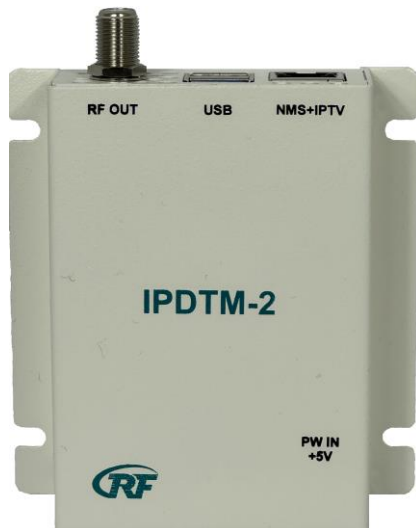

IPDTM-2 is a Full-HD modulator for max to 4 internet TV HLS streaming or internetvideo broadcasting on DVB-C or -T format to antenna network.

Resolution and compression are forwarded from input signal as original thought the device process. Max resolution is FULL HD 1920*1080p

To modulation format can be selected cable DVB-C or terrestrial DVB-T.

Unit is very easy to setup without any extra control unit , by a web browser. It is very small size device.

Possible to connect Axing Smartportal.

USB C-power supply connector.

Designed and manufactured in Finland.



Features

- ❑ Full HD
- ❑ IPTV input:
RJ-45/1Gbps
UDP, HLS,
UDP Multicast
- ❑ max. resolution
1920*1080p.
- ❑ DVB-C/T output

Technical parameters

Output

- ❑ DVB-C
QAM64,QAM128,QAM256
- ❑ Baud rate 5 to 6,96MS/s
- ❑ 2k, 8k @ DVB-T / QAM64
- ❑ Output level 110 dBuV max
- ❑ Output frequency range:
114 ... 950 MHz
- ❑ LCN
- ❑ Program name
- ❑ NIT

General

- ❑ Power consumption
5VDC/1,1A via USB-C
- ❑ Dimensions
30 mm*91mm* 112 mm

RF-Tuote Oy, Joensuunkatu 13, 24100 Salo, FINLAND

tel: +358-2-7366360

e-mail: info@rf-tuote.fi

www.rf-tuote.fi

