


DABIP-800

8chs FM/DAB/DAB+ STREAMER to IP Radio

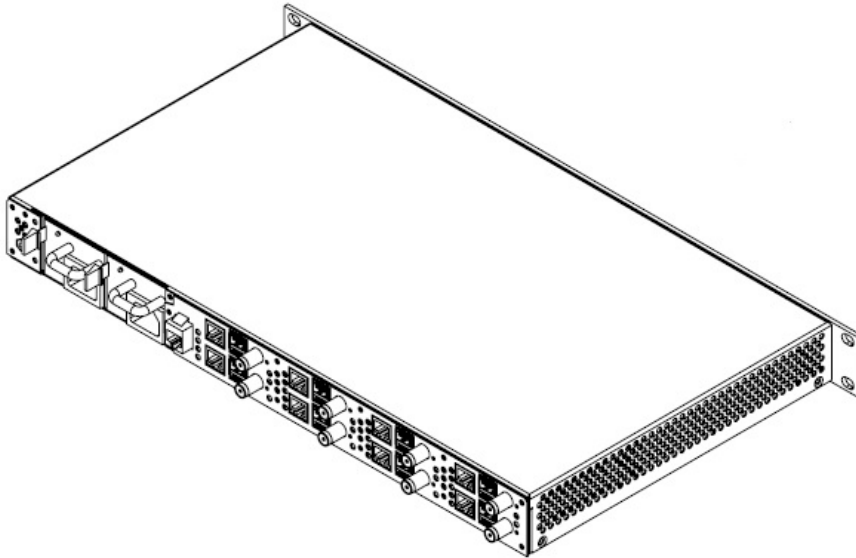

DABIP-800 is a streamer for analogue FM stereo or digital audio broadcast radio signals from DAB/DAB+ channels 5A-13F / VHFIII band to SPTS UPD IP Radio. Also internet radio input possibility.

It features conversion with the highest quality Easy web based programming and remote configuration is possible. Can be assembled to 19" rack or direct to wall mounting

Possible to remote control via Smartportal service by mobile phone , pad or PC over the world widely.

Redundant hot pluggable power supply (option RPS) by request.

Models:

DABIP-400 4*FM or DAB/DAB+ Radio to 4 SPTS OUT

DABIP-800 8*FM or DAB/DAB+ Radio to 8 SPTS OUT

DABIP-400RPS 4*FM or DAB/DAB+ Radio to 4 SPTS

DABIP-800RPS 8*FM or DAB/DAB+ Radio to 8 SPTS



Features

- ❑ 8 Analogue FM stereo receivers
- ❑ 8 DAB/DAB+ receivers
- ❑ AAC coding to IP
- ❑ 19" 1RU or wall mounting housing

Technical specification

- ❑ Input frequency range 88.200-239.200 MHz
- ❑ FM band 88 – 107,9MHz
- ❑ DAB Channels 5A - 13F
- ❑ Input level 48...78 dBµV
- ❑ Internet FTA radio input

IP Radio output

- ❑ RJ-45, 1000 Base-T
- ❑ UDP

Universal:

- ❑ Power consumption 100-240 VAC/ 25W
- ❑ Size 1RU 19"

